

Tri-Vent® Series KT8

Side Access Manifold Inline Intake Filter Silencer




The Series KT8 is for inline applications where remote outside air and indoor service is desirable. Low differential pressures and Tri-Vent® Elements with Enduralast® Synthetic Media extend service intervals, reducing power usage and operating costs. Protect equipment with Zero-Bypass design and people with No-Tools element changes.





Shown with Easy-Level Support Legs

Flow Curve

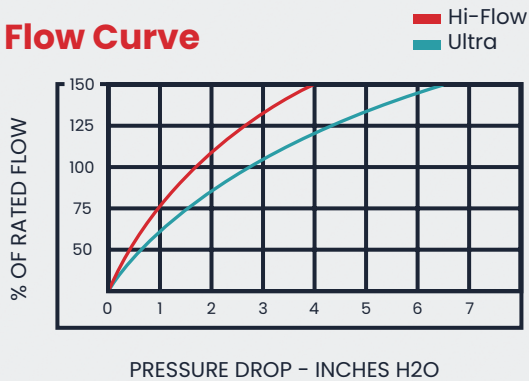

Noise Attenuation

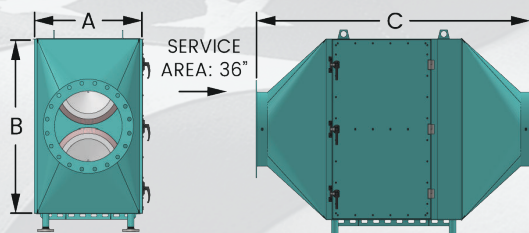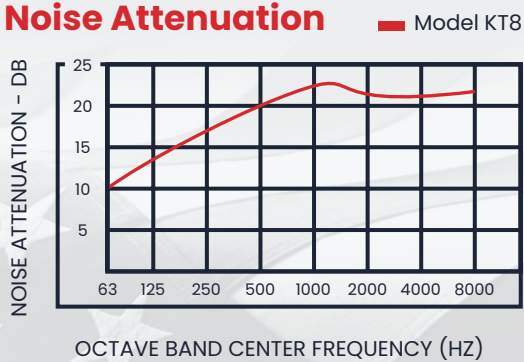

Standard Features

- Zero-Bypass Design • Reduced Power Consumption • Powder Coated
- One-Year Return on Investment • 30-50% Less Restriction • Light Weight
- No-Tools Element Changes • Enduralast® Synthetic Media

Options

- Custom fittings • Special coatings • FDA/USDA standards
- Stainless Steel • RAL Color Matching

Model #	Element Qty	Enduralast® Element Number		ANSI FLG Size	Dimensions			Rated Flow (SCFM)	Weight (LBS)
		Ultra Synthetic, 99.97% efficient @ 1-μ (nom)	Hi-Flow Synthetic, 98% efficient @ 10-μ (nom)		A	B	C		
KT8ROO	2	E045777	E047937	20	40	60	95	20,000	800
KT8RPP	2	E045777	E047937	24	40	60	95	25,000	800
KT8RPP	4	E045777	E047937	24	62	60	95	25,000	1450
KT8RYY	4	E045777	E047937	30	62	60	95	30,000	1500
KT8RYY	6	E045777	E047937	30	62	88	95	30,000	2050
KT8REE	4	E045777	E047937	36	62	60	95	40,000	1550
KT8REE	6	E045777	E047937	36	62	88	95	40,000	2100
KT8RDD	6	E045777	E047937	42	62	88	95	52,000	2150
KT8RDD	9	E045777	E047937	42	90	88	118	52,000	2350
KT8RCC	6	E045777	E047937	48	62	88	95	65,000	2200
KT8RCC	9	E045777	E047937	48	90	88	118	65,000	2400
KT8RHH	9	E045777	E047937	54	90	88	118	80,000	2450
KT8RKK	9	E045777	E047937	60	90	88	118	90,000	2450