

# Tri-Vent® Series TKT

## Bottom Outlet Manifold Intake Filter Silencer




A small footprint solution for high volume applications: the Zero-Bypass Tri-Vent® Series TKT protects blowers and compressors with inlet connections up to 48". Tri-Vent® technology extends filter element service life and reduces energy consumption for ROI in under a year. No-Tools element changes make maintenance easy and safe.




Shown with available Series DK® Freeze Discouragement Discharge-air Knife

### Flow Curve

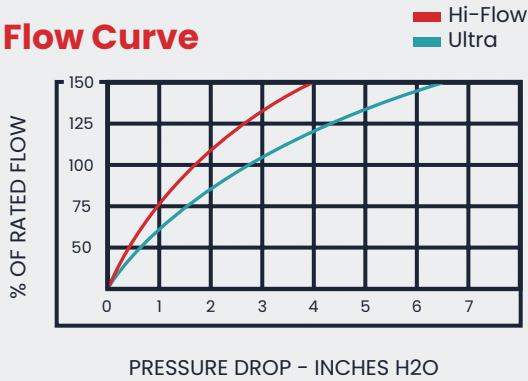

### Noise Attenuation

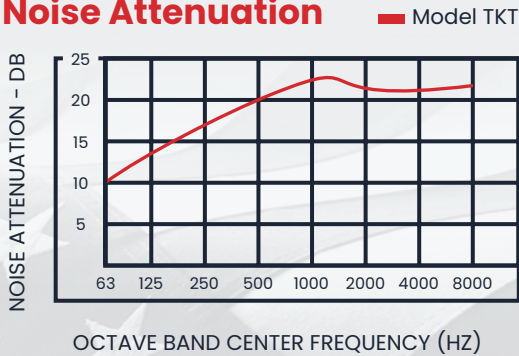


### Standard Features

- Zero-Bypass Design • Reduced Power Consumption • Powder Coated
- One-Year Return on Investment • 30-50% Less Restriction • Light Weight
- No-Tools Element Changes • Endurast® Synthetic Media

### Options

- Custom fittings • Special coatings • FDA/USDA standards
- Stainless Steel • RAL Color Matching

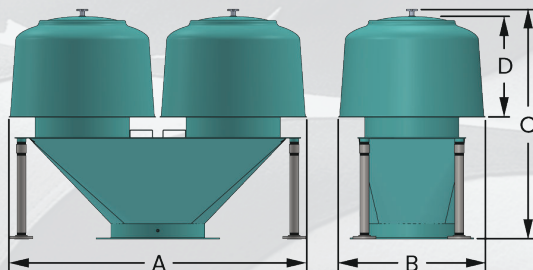

Model #	Element Qty	Endurast® Element Number		ANSI FLG Size	Dimensions				Rated Flow (SCFM)	Weight (LBS)
		Ultra Synthetic, 99.97% efficient @ 1-μ (nom)	Hi-Flow Synthetic, 98% efficient @ 10-μ (nom)		A	B	C	D		
TKTRO	2	E045777	E047937	20	77	38	60	26	20,000	400
TKTRP	2	E045777	E047937	24	77	38	60	26	25,000	425
TKTRP	4	E045777	E047937	24	77	77	60	26	25,000	775
TKTRY	4	E045777	E047937	30	77	77	60	26	30,000	800
TKTRY	6	E045777	E047937	30	116	77	68	26	30,000	1200
TKTREE	4	E045777	E047937	36	77	77	60	26	40,000	850
TKTREE	6	E045777	E047937	36	116	77	68	26	40,000	1250
TKTRDD	6	E045777	E047937	42	116	77	68	26	52,000	1300
TKTRCC	6	E045777	E047937	48	116	77	68	26	65,000	1350